



DESIGN FUNCTION PERFORMANCE



Diesel & AdBlue®

Product Guide

Doc Ref: Tuffa-AD-PG-2026-02 | Version 2.0 | Effective Date: September 2026

Diesel & AdBlue® Storage Tanks & Dispensers
from 1,350 to 100,000 litres



Built on Trust

The Tuffa range of diesel and AdBlue® storage and dispensing tanks have been trusted by businesses for their diesel storage and dispensing needs for more than 40 years. Tanks are available from 1,350 to 100,000 litres.



Why Tuffa?

- We are a British manufacturer with more than 40 years design and manufacturing experience.
- We build every tank to perform, last, and comply.
- We offer a vast range of customisable storage solutions in both plastic and steel.
- We design and innovate in-house, using British engineering at its core.

NEED MORE
INFORMATION?
CALL US ON
01889 567700



The Benefits

With Tuffa, you will benefit from the following:

- Reliable, responsive support — straight from the people who built your tank.
- Minimum 20-year design life and 10-year warranty on all bunded tanks, when registered.
- Tanks compatible with kerosene, gas oil and E-fuels such as HVO.
- Premium materials and equipment at competitive rates.
- Loyalty to our dealers.
- Industry approved tanks that are CE marked and fully compliant with current regulations and safety standards.



Models and Specifications

Bunded Diesel Tanks / Plastic



1350SLBFS

Capacity	Length	Width	Height	Weight
1,350 litres	2,680mm	870mm	1,665mm	190kg



2500HBFS

Capacity	Length	Width	Height	Weight
2,500 litres	2,840mm	1,520mm	1,630mm	280kg



3500VBFS

Capacity	Diameter	Height	Weight
3,500 litres	2,013mm	2,520mm	350kg

Cabinet:

Height	Width	Depth
2,050mm	1,215mm	600mm



6000VBFS

Capacity	Diameter	Height	Weight
6,000 litres	2,550mm	2,585mm	430kg

Cabinet:

Height	Width	Depth
2,050mm	1,215mm	600mm



10000VBFS

Capacity	Diameter	Height	Weight
10,000 litres	2,890mm	2,590mm	500kg

Cabinet:

Height	Width	Depth
2,050mm	1,215mm	600mm



15000VBFS

Capacity	Diameter	Height	Weight
15,000 litres	2,890mm	3,500mm	700kg

Cabinet:

Height	Width	Depth
2,050mm	1,215mm	600mm



30000VBFS

Capacity*	Weight**
30,000 litres	1,330kg

Cabinet:

Height	Width	Depth
2,050mm	1,215mm	600mm

* x2 15000VBFS interlinked


** approximate

Largest
Plastic Diesel
Tanks in
the UK

Models and Specifications

Specifications – Bunded Diesel Tanks

	Small Diesel – Plastic	Large Diesel – Plastic	Large Diesel – Plastic
Feature	1350–2500L	3500–15000L	30000L
2" BSP Fill Point	✓	✓	✓
Vent	✓	✓	✓
6m Hose	✓	✓	✓
Auto Shut-Off Nozzle	✓	✓	✓
K33 Mechanical Flowmeter	✓	✓	✓
Nozzle Holster	✓	✓	✓
10 Micron Water & Particulate Filter	✓	✓	✓
Lockable Flip Lid	✓		
Overfill Prevention Valve		✓	✓
FMS Contents Gauge & Alarm – 230V		✓	✓
Control Panel with Key Switch – 230V		✓	✓
Lockable Cabinet		✓	✓
Optional Extras			
Manual Float Level Gauge	001-T		
230V External Pump + Watchman Sonic	002-T		
230V External Pump + Watchman Sonic + Pulsemeter	003-T		
12/24V Pump	004-T		
12/24V Pump + Watchman Sonic	005-T		
230V External Pump + 1" Bottom Outlet	006-T		
230V External Pump + Watchman Sonic + 1" Bottom Outlet	007-T		
230V External Pump		001-T	001-T
230V External Pump + Pulsemeter		002-T	002-T
230V High Flow Pump + 10m Hose Reel		003-T	003-T
230V High Flow Pump + 10m Hose Reel + Pulsemeter		004-T	004-T
230V High Flow Pump + 10m Hose Reel + Fuel Management		005-T	005-T
230V External Pump + 10m Hose Reel		006-T	006-T
230V High Flow Pump		007-T	007-T
230V High Flow Pump + Pulsemeter		008-T	008-T
230V External Pump + Fuel Management		009-T	009-T
230V High Flow Pump + Fuel Management		010-T	010-T
12V Pump		011-T	
24V Pump		012-T	
230V External Pump + 10m Hose Reel + Fuel Management		013-T	011-T
Codes	1350SLBFS- 2500HBFs-	3500VBFS- 6000VBFS- 10000VBFS- 15000VBFS-	30000VBFS-

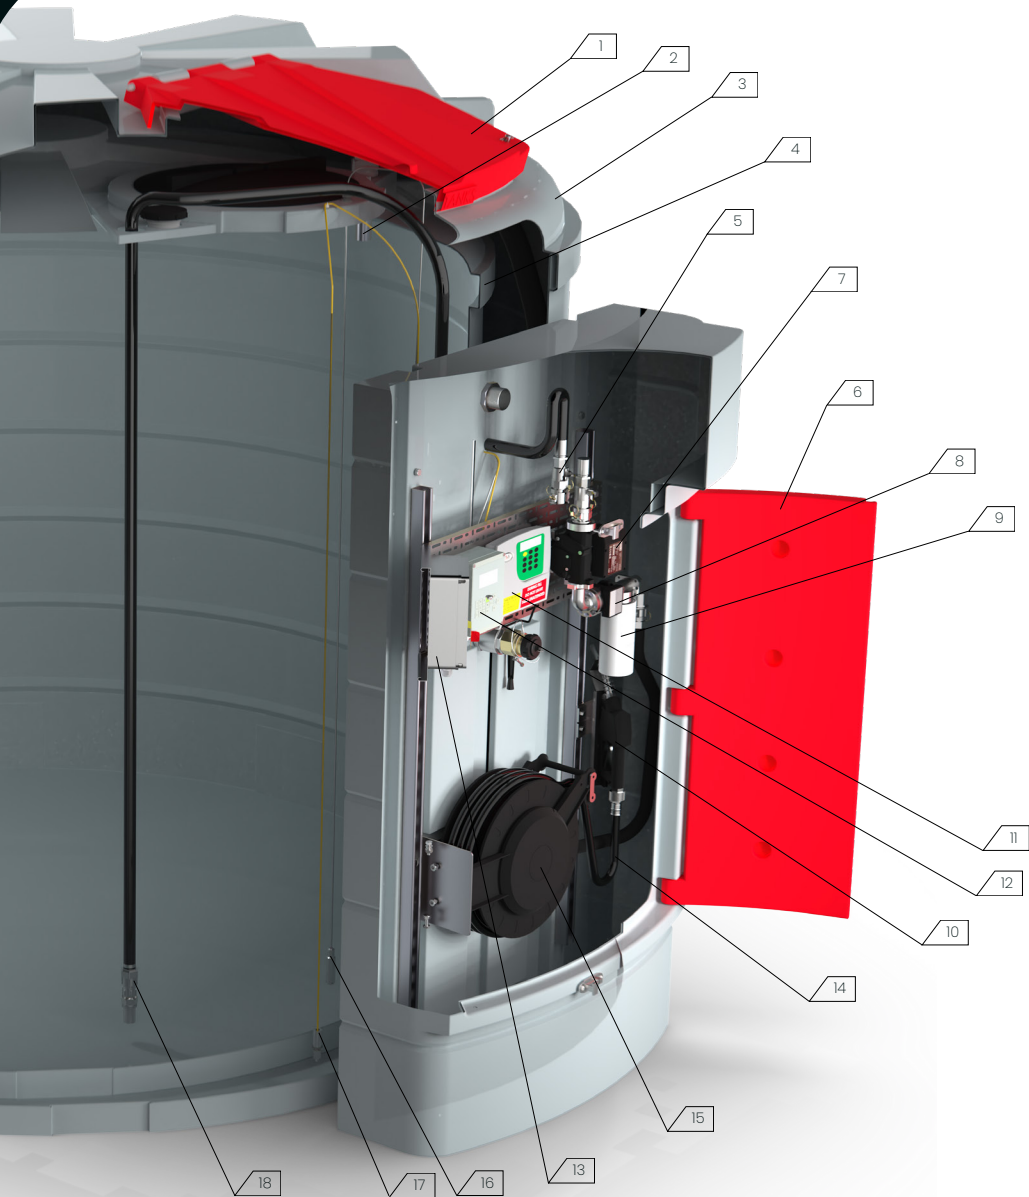

- | | | |
|--------------------------------------|---|---|
| 1. Lockable Access Hatch | 7. External Pump | 13. Electrical Control Panel |
| 2. Overfill Prevention Valve | 8. Mechanical Flow/Pulse Meter | 14. 8-Metre Dispensing Hose |
| 3. Bunded Outer Tank | 9. 10 Micron Water & Particulate Filter | 15. Retractable Hose Reel |
| 4. Internal Tank | 10. Automatic Shut-Off Nozzle | 16. Level Pressure Sensor |
| 5. Isolation Valve | 11. Contents Gauge | 17. Bund Float Switch |
| 6. High-Security Double-Door Cabinet | 12. Fuel Management System | 18. Suction Line with In-Line Filter & Non-Return Valve |

Models and Specifications

Bunded AdBlue® Storage & Dispensing Tanks / Plastic



1350SLBFSAD

Capacity	Length	Width	Height	Weight
1,350 litres	2,680mm	870mm	1,665mm	190kg



2500HBFSAD

Capacity	Length	Width	Height	Weight
2,500 litres	2,840mm	1,520mm	1,630mm	280kg



3500VBFSAD

Capacity	Diameter	Height	Weight
3,500 litres	2,013mm	2,520mm	350kg

Cabinet:

Height	Width	Depth
2,050mm	1,215mm	600mm



6000VBFSAD

Capacity	Diameter	Height	Weight
6,000 litres	2,550mm	2,585mm	430kg

Cabinet:

Height	Width	Depth
2,050mm	1,215mm	600mm



10000VBFSAD

Capacity	Diameter	Height	Weight
10,000 litres	2,890mm	2,590mm	500kg

Cabinet:

Height	Width	Depth
2,050mm	1,215mm	600mm



15000VBFSAD

Capacity	Diameter	Height	Weight
15,000 litres	2,890mm	3,500mm	700kg

Cabinet:

Height	Width	Depth
2,050mm	1,215mm	600mm



**premium
quality**

The quality of our tanks make them the best value for money



**ultra
strong**

Our tanks are the toughest tanks on the market

**total
satisfaction**



96% of our customers would recommend us

**bespoke
tanks**

A bespoke tank fabrication allows you to build a tank to your specification

Models and Specifications

Specifications – Bunded AdBlue Tanks

	Small AdBlue Dispenser	Small AdBlue Dispenser – Sub Pump Terminating in Cabinet	Large AdBlue Dispenser	Large AdBlue Dispenser – Sub Pump Terminating in Cabinet	Small AdBlue Storage	Large AdBlue Storage
Feature	1350-2500L	1350-2500L	3500-15000L	3500-15000L	1350-2500L	3500-15000L
2" Dy Break Fill Coupling	✓	✓	✓	✓	✓	✓
Screened Vent	✓	✓	✓	✓	✓	✓
External Pump – 230V	001-T		✓			
Submersible Pump – 230V						
Control Panel with Key Switch / Autonozzle Switch		✓	✓	✓		
8m Hose	✓					
Auto Shut Off Nozzle	✓		✓			
Digital Flowmeter	✓		001-T			
FMS Contents Gauge & Alarm – 230V			✓	✓		✓
Stainless Steel 'Y' Filter			✓	✓		
Lockable Cabinet			✓	✓		✓
Nozzle Holster	✓		✓			
Inline Strainer	✓					
Manual Float Level Gauge	✓				✓	
Lockable Flip Lid	✓	✓			✓	
1" Top Suction Outlet with Foot Valve & Ball Valve*					✓	✓
Optional Extras						
Submersible Pump Terminating on Top of Inner Tank with 'Y' Filter and Ball Valve		005-T				
Submersible Pump Terminating in Cabinet				005-T		
External Pump – 12V	003-T					
External Pump – 24V	004-T					
External Pump – 240V + Pulsemeter	002-T		002-T			
Pulsemeter + 8m Hose Reel			003-T			
Pulsemeter + 8m Hose Reel + Fuel Management			004-T			
Pulsemeter + Fuel Management			008-T			
Codes	1350SLBFSAD-2500HBFSAD-	1350SLBFSAD-2500HBFSAD-	3500VBFSAD-6000VBFSAD-10000VBFSAD-15000VBFSAD-	3500VBFSAD-6000VBFSAD-10000VBFSAD-15000VBFSAD-	1350SLBAD-2500HBAD-	3500VBAD-6000VBAD-10000VBAD-15000VBAD-

*terminating in the cabinet for larger models