



TECHNICAL SPECIFICATION

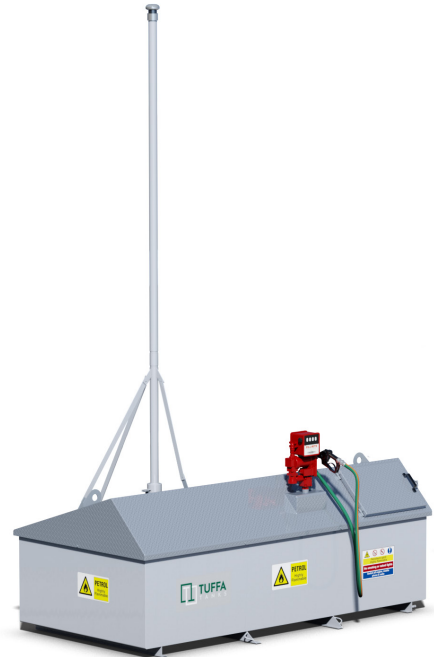

MODEL:	1950PT
CAPACITY (l):	1950
LENGTH(mm):	2860
WIDTH (mm):	1460
HEIGHT (mm):	4500
WEIGHT (kg):	940
MATERIAL:	3mm mild steel



SPECIFICATION

- ▶ Fire protective jacket on primary tank
- ▶ 4" BSP fill connection with cap and chain
- ▶ 2" 4.5m spark arrestor vent stack
- ▶ Lockable access hatch
- ▶ Plastic dipstick
- ▶ Fork lift skids
- ▶ Bolt down connections
- ▶ Earth strap and rod
- ▶ Powder coated paintwork. Colour RAL 7035 Grey (tank and vent) and RAL 9006 Grey (lid)
- ▶ Pump with inline strainer options: 240V, 12V, hand pump
- ▶ Steel welded construction for primary tank and bund

OPTIONAL EXTRAS

- ▶ Hand pump
- ▶ 12V pump
- ▶ 240V pump
- ▶ Flowmeter
- ▶ Pump cabinet
- ▶ Fire kit
- ▶ Spill kit

Designed in accordance with HSG176, DSEAR and the Blue Book.



Tuffa UK Limited
Dovefields Industrial Estate,
Derby Road, Uttoxeter
Staffs, ST14 8SW



... for all your liquid storage needs

Contact us on T: 01889 567700 | E: sales@tuffa.co.uk | W: www.tuffa.co.uk