


## TECHNICAL SPECIFICATION



**NEED MORE  
INFORMATION?**  
CALL US ON:  
01889 567700



|                      |                       |
|----------------------|-----------------------|
| <b>MODEL:</b>        | <b>2500PT</b>         |
| <b>CAPACITY (l):</b> | <b>2500</b>           |
| <b>LENGTH(mm):</b>   | <b>3040</b>           |
| <b>WIDTH (mm):</b>   | <b>1800</b>           |
| <b>HEIGHT (mm):</b>  | <b>4500</b>           |
| <b>WEIGHT (kg):</b>  | <b>1160</b>           |
| <b>MATERIAL:</b>     | <b>3mm mild steel</b> |

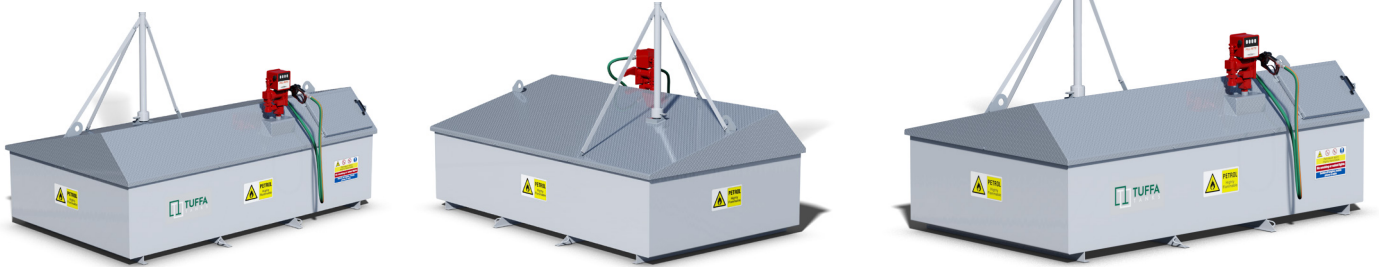

### SPECIFICATION

- ▶ Fire protective jacket on primary tank
- ▶ 4" BSP fill connection with cap and chain
- ▶ 2" 4.5m spark arrestor vent stack
- ▶ Lockable access hatch
- ▶ Plastic dipstick
- ▶ Fork lift skids
- ▶ Bolt down connections
- ▶ Earth strap and rod
- ▶ Powder coated paintwork. Colour RAL 7035 Grey (tank and vent) and RAL 9006 Grey (lid)
- ▶ Pump with inline strainer options: 240V, 12V, hand pump
- ▶ Steel welded construction for primary tank and bund

### OPTIONAL EXTRAS

- ▶ Hand pump
- ▶ 12V pump
- ▶ 240V pump
- ▶ Flowmeter
- ▶ Pump cabinet
- ▶ Fire kit
- ▶ Spill kit

Designed in accordance with HSG176, DSEAR and the Blue Book.



Tuffa UK Limited  
Dovefields Industrial Estate,  
Derby Road, Uttoxeter  
Staffs, ST14 8SW



**... for all your liquid storage needs**

**Contact us on T: 01889 567700 | E: sales@tuffa.co.uk | W: www.tuffa.co.uk**