


## TECHNICAL SPECIFICATION



**NEED MORE INFORMATION?**  
CALL US ON:  
01889 567700



<b>MODEL:</b>	<b>2500PT</b>
<b>CAPACITY (l):</b>	<b>2500</b>
<b>LENGTH(mm):</b>	<b>3040</b>
<b>WIDTH (mm):</b>	<b>1800</b>
<b>HEIGHT (mm):</b>	<b>4500</b>
<b>WEIGHT (kg):</b>	<b>1160</b>
<b>MATERIAL:</b>	<b>3mm mild steel</b>

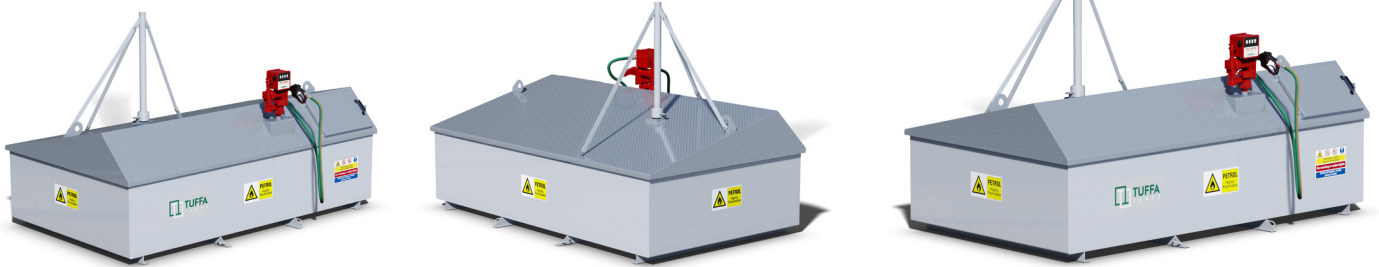

### SPECIFICATION

- ▶ Fire protective jacket on primary tank
- ▶ 4" BSP fill connection with cap and chain
- ▶ 2" 4.5m spark arrestor vent stack
- ▶ Lockable access hatch
- ▶ Plastic dipstick
- ▶ Fork lift skids
- ▶ Bolt down connections
- ▶ Earth strap and rod
- ▶ Powder coated paintwork. Colour RAL 7035 Grey (tank and vent) and RAL 9006 Grey (lid)
- ▶ Pump with inline strainer options: 240V, 12V, hand pump
- ▶ Steel welded construction for primary tank and bund

### OPTIONAL EXTRAS

- ▶ Hand pump
- ▶ 12V pump
- ▶ 240V pump
- ▶ Flowmeter
- ▶ Pump cabinet
- ▶ Fire kit
- ▶ Spill kit
- ▶ 1.5" top suction complete with anti-siphon valve and dispenser plinth

**Note:** This system is not designed to be sited on a raised base, the tank must be sited at the same level as the delivery tanker.

Designed in accordance with HSG176, DSEAR and the Blue Book.



Tuffa UK Limited  
Dovefields Industrial Estate,  
Derby Road, Uttoxeter  
Staffs, ST14 8SW



**... for all your liquid storage needs**

**Contact us on T: 01889 567700 | E: sales@tuffa.co.uk | W: www.tuffa.co.uk**